


ZACISKI LINOWE OCYNKOWANE


ZACISK LINOWY KABŁĄKOWY wg DIN 741 ocynkowany

symbol	rozmiar nominalny	na linę [φ]	L	B	waga
	[mm]	[mm]	[mm]	[mm]	[kg/szt]
ZL03	3	2,5-3,0	5,00	18,00	0,008
ZL05	5	3,0-5,0	7,00	22,00	0,013
ZL065	6,5	5,0-6,5	8,00	24,00	0,016
ZL08	8	6,5-8,0	10,00	29,00	0,028
ZL10	10	8,0-10,0	11,00	34,00	0,057
ZL11	11	10,0-11,0	11,00	34,00	0,058
ZL13	13	11,0-13,0	14,00	41,00	0,112
ZL14	14	13,0-14,0	14,00	44,00	0,116
ZL16	16	14,0-16,0	18,00	49,00	0,190
ZL19	19	16,0-19,0	20,00	54,00	0,240
ZL22	22	19,0-22,0	23,00	62,00	0,364
ZL26	26	22,0-26,0	29,00	65,00	0,393
ZL30	30	26,0-30,0	33,00	76,00	0,594
ZL34	34	30,0-34,0	37,00	81,00	0,732
ZL40	40	34,0-40,0	43,00	87,00	0,930
ZL45	45	40,0-45,0	48,00	110,00	1,430
ZL50	50	45,0-50,0	62,00	115,00	1,830




ZACISK LINOWY KABŁĄKOWY wg DIN 1142 ocynkowany

symbol	rozmiar nominalny	na linę [φ]	L	B	waga
	[mm]	[mm]	[mm]	[mm]	[kg/szt]
ZLW065	6,5	5,0-6,5	8,00	30,00	0,035
ZLW08	8	6,5-8,0	12,00	39,00	0,079
ZLW10	10	8,0-10,0	12,00	40,00	0,093




ZACISK LINOWY SIODEŁKOWY POJEDYNCZY ocynkowany

symbol	rozmiar nominalny	na linę [φ]	L	H	waga
	[mm]	[mm]	[mm]	[mm]	[kg/szt]
ZLSP02	2	1,8-2,0	5,00	16,00	0,0052
ZLSP03	3	2,0-3,0	7,00	18,00	0,0072
ZLSP04	4	3,0-4,0	9,00	22,00	0,0110
ZLSP05	5	4,0-5,0	11,00	25,00	0,0130
ZLSP06	6	5,0-6,0	12,00	30,00	0,0200
ZLSP08	8	6,0-8,0	17,00	37,00	0,0470



ZACISK LINOWY SIODEŁKOWY PODWÓJNY ocynkowany


symbol	rozmiar nominalny	na linę [φ]	L	H	waga
	[mm]	[mm]	[mm]	[mm]	[kg/szt]
ZLS02	2	1,8-2,0	5,00	30,00	0,011
ZLS03	3	2,0-3,0	7,00	35,00	0,013
ZLS04	4	3,0-4,0	9,00	40,00	0,020
ZLS05	5	4,0-5,0	10,00	50,00	0,032
ZLS06	6	5,0-6,0	12,00	60,00	0,038
ZLS08	8	6,0-8,0	18,00	76,00	0,098

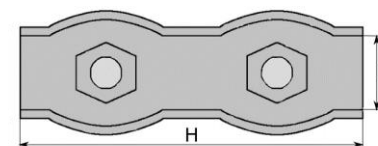

ZACISKI LINOWE NIERDZEWNE

ZACISK LINOWY KABŁĄKOWY wg DIN 741 nierdzewny AISI316

symbol	rozmiar nominalny	na linę [φ]	L	B	waga
	[mm]	[mm]	[mm]	[mm]	[kg/szt]
NZL04	4	2,5-4,0	6,00	22,00	0,016
NZL05	5	4,0-5,0	6,00	23,00	0,017
NZL065	6,5	5,0-6,5	8,00	26,00	0,022
NZL08	8	6,5-8,0	11,00	30,00	0,037
NZL10	10	8,0-10,0	12,00	34,00	0,062
NZL12	12	11,0-12,0	12,00	37,00	0,082
NZL16	16	13,0-16,0	17,00	50,00	0,229



ZACISK LINOWY SIODEŁKOWY PODWÓJNY nierdzewny AISI316

symbol	rozmiar nominalny	na linę [φ]	L	H	waga
	[mm]	[mm]	[mm]	[mm]	[kg/szt]
NZLS03	3	2,0-3,0	7,00	35,00	0,013
NZLS04	4	3,0-4,0	8,00	40,00	0,021
NZLS05	5	4,0-5,0	10,00	50,00	0,027
NZLS06	6	5,0-6,0	12,00	60,00	0,053

